



CSA TRAY RATED

HVTC SPECIFICATIONS

HVTC AL 1/C 115TRXLPE TS PVC 8KV 100% CSA



Southwire®
C A N A D A

PRODUCT HIGHLIGHTS

Southwire's 8KV HVTC is a CSA approved copper tape shielded cable for Industrial and Commercial medium voltage applications. FT4, -40°C, and 105°C rated for use in harsh Canadian environments. Rated for installation in cable trays, duct banks, direct burial, troughs, continuous rigid cable supports and concrete encaseable. For use in cable trays, exposed run and hazardous locations as per the limitations in the Canadian Electrical Code Part I, particularly Table 19.

CONSTRUCTION

Conductor

- Class B - compact stranded -8000 Series Aluminum -ACM

Options

- Class B compact stranded copper
- Class B compressed stranded copper
- Strand blocking technology
- Tinning on copper conductors

Conductor Shield

- Extruded semi-conducting thermosetting polymeric layer

Insulation

- TR-XLPE - (Tree Retardent Cross Linked Polyethylene)
- Thickness: 0.115 inches (2.92mm) - nominal
- Insulation level: 100% - grounded system
- 105°C rated

Insulation Shield

- Extruded Semi-conducting thermosetting polymeric layer
- CSA 68.10 - Shield Removal/termination requirements are printed on the surface
- Meets requirement of ICEA but built to CSA standards

Copper Tape Shield

- Helically wrapped 5 mil copper tape with 25% overlap
- Not designed to carry ground fault current
- A separate bonding/grounding conductor may be required

Overall Jacket

- Black PVC (optional colours available)
- Nominal Thickness:
No.2 AWG to No.1/0 AWG = 0.06 inches (1.52mm)
No.2/0 AWG to 1000 kcmil = 0.08 inches (2.03mm)

Typical Print Legend

- (CSA) SOUTHWIRE (NESC) #P# [#AWG or #kcmil] CPT AL 115 TRXLPE 8KV 100% INS LEVEL 25% TS SUN RES TC-ER 105° FT4 (-40°C) LTGG RoHS YEAR [SEQUENTIAL METER MARKS]

TABLE 1 - WEIGHTS & MEASUREMENTS

HVTC Product Code	Conductor Size *	Conductor Diameter		Diameter Over Insulation		Diameter Over Insulation Shield		Approx. Overall Diameter		Minimum Bend Radius		Approx. Weight of Cable		Max. Reel Weight (reel and cable) **		Max. Reel Diameter / Width **		Max. Length of Cable on Reel **	
	AWG or Kcmil	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	lb / 1000ft	kg/km	lbs	kg	inches	m	feet	m
AL115M81-002	2(7)	0.268	6.8	0.528	13.4	0.608	15.4	0.748	19.0	9.0	228	288	429	2006	910	60/32	1.52/0.81	6000	1829
AL115M81-001	1(19)	0.299	7.6	0.559	14.2	0.639	16.2	0.779	19.8	9.3	237	318	473	2181	989	60/32	1.52/0.81	6000	1829
AL115M81-010	1/0(19)	0.336	8.5	0.596	15.1	0.676	17.2	0.816	20.7	9.8	249	354	526	2322	1053	72/42	1.83/1.07	6000	1829
AL115M81-020	2/0(19)	0.376	9.6	0.636	16.2	0.716	18.2	0.896	22.8	10.8	273	429	639	2775	1259	72/42	1.83/1.07	6000	1829
AL115M81-030	3/0(19)	0.423	10.7	0.683	17.3	0.763	19.4	0.943	24.0	11.3	287	483	719	3098	1405	72/42	1.83/1.07	6000	1829
AL115M81-040	4/0(19)	0.475	12.1	0.735	18.7	0.815	20.7	0.995	25.3	11.9	303	548	816	3488	1582	72/42	1.83/1.07	6000	1829
AL115M81-250	250(37)	0.520	13.2	0.790	20.1	0.870	22.1	1.050	26.7	12.6	320	613	912	4429	2009	78/54	1.98/1.37	6000	1829
AL115M81-350	350(37)	0.616	15.6	0.886	22.5	0.966	24.5	1.146	29.1	13.8	349	751	1118	5258	2385	78/54	1.98/1.37	6000	1829
AL115M81-500	500(37)	0.736	18.7	1.006	25.6	1.086	27.6	1.266	32.2	15.2	386	948	1410	6435	2919	78/54	1.98/1.37	6000	1829
AL115M81-750	750(61)	0.908	23.1	1.188	30.2	1.268	32.2	1.448	36.8	17.4	441	1274	1896	8804	3993	96/54.5	2.44/1.38	6000	1829
AL115M81-1000	1000(61)	1.060	26.9	1.340	34.0	1.420	36.1	1.600	40.6	19.2	488	1580	2351	10820	4908	104/56.5	2.64/1.44	6000	1829

NOTE: These are minimum average dimensions as per CSA Standards.

* Other conductor sizes and outer jacket colours are available upon request. (#s in brackets represent # of strands / conductor)

** Longer maximum lengths may be possible. Standard sizes and lengths may be supplied. Reel sizes are not guaranteed. The factory reserves the right to make changes as necessary to optimize manufacturing requirements.





CSA TRAY RATED

HVTC SPECIFICATIONS

HVTC AL 1/C 115TRXLPE TS PVC 8KV 100% CSA



Southwire®
CANADA

DESIGN

Qualification Standards

- CSA C68.10 - Shielded Power Cables for Commercial and Industrial Applications - 5 to 46 kV
- CSA C68.3 - Shielded & Concentric Neutral Power Cable - 5 to 46 kV
- CSA C22.2 No. 230 - Tray Cables
- ICEA S-93-639 (NEMA WC 74) 5 to 46 kV - Shielded Power Cable
- AEIC CS-8 - Qualification Testing Requirements

Flame Test Ratings


- FT1 - Flame Test - (1,706 BTU/Hr. nominal - Vertical Wire Flame Test)
- FT4, Flame Test - (70,000 BTU/Hr. - Vertical Tray Flame Test)
- IEEE 1202 - Flame Test - (70,000 BTU/Hr. - Vertical Tray Test)
- IEEE 383 - Flame Test - (70,000 BTU/Hr.)
- ICEA T-29-520 - Vertical Cable Tray Flame Test - (210,000 BTU/Hr)

Product Ratings

- CSA C22.2 No. 2556 & No. 0.3 - Wire and Cable Test Methods
- CSA LTGG [-40°C] - as per C68.10 - for Cold Bend and Impact rating
- CSA FT4 - for Flame Retardancy rating
- CSA SUN RES - for Sunlight Resistant rating
- CSA TC-ER (marked TC for No. 1/0 AWG and larger)***

Operating Temperatures

- -40°C - CSA Cold Bend and Impact Temperature
- -25°C - Min. Installation Temperature
- 105°C - Max Continuous Operating Temperature
- 140°C for Emergency Overload Temperature
- 250°C for Short Circuit Temperature

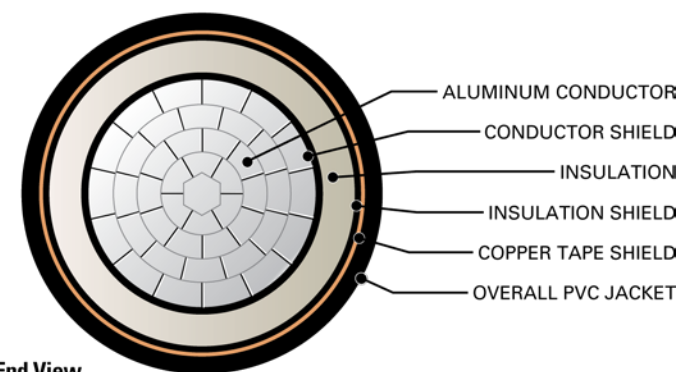

End View

TABLE 2 - ENGINEERING SPECIFICATIONS

HVTC Product Code	Maximum Pulling Tension		DC Resistance @ 25°C R _{DC}		AC Resistance @ 90°C 60 Hz (triplex formation) R _{AC}		Inductance L		Capacitance C		Inductive Reactance @ 60Hz (triplexed) X _L		Capacitive Reactance @ 60Hz (triplexed) X _C		Positive - Sequence Impedance*	Zero - Sequence Impedance*	Short Circuit Current (each phase conductor) @ 60Hz	Allowable Ampacities in Ventilated Cable Tray †	Allowable Ampacities Directly Buried in Earth ‡
	lb	Newtons	Ω / 1000 ft.	Ω / km	Ω / 1000 ft.	Ω / km	mH / 1000 ft	mH / km	μF / 1000 ft	μF / km	Ω / 1000 ft.	Ω / km	MΩ • 1000ft	MΩ • km	Ω / 1000ft	Ω / 1000ft	kAmps	Amps	Amps
AL115M81-002	398	1771	0.265	0.869	0.333	1.093	0.0989	0.3245	0.0575	0.1886	0.0373	0.1223	0.0461	0.0141	0.333 + j0.045	0.699 + j0.514	3.1	169	176
AL115M81-001	502	2234	0.211	0.692	0.265	0.870	0.0957	0.3140	0.0623	0.2044	0.0361	0.1184	0.0426	0.0130	0.266 + j0.044	0.633 + j0.496	3.9	194	198
AL115M81-010	634	2818	0.168	0.551	0.211	0.693	0.0925	0.3035	0.0680	0.2231	0.0349	0.1144	0.0390	0.0119	0.212 + j0.042	0.581 + j0.476	5.0	222	223
AL115M81-020	799	3552	0.133	0.436	0.167	0.549	0.0896	0.2940	0.0742	0.2433	0.0338	0.1108	0.0358	0.0109	0.168 + j0.042	0.538 + j0.455	6.3	255	250
AL115M81-030	1007	4478	0.105	0.345	0.132	0.433	0.0868	0.2847	0.0814	0.2669	0.0327	0.1073	0.0326	0.0099	0.133 + j0.040	0.503 + j0.432	7.9	290	278
AL115M81-040	1270	5647	0.084	0.274	0.105	0.345	0.0842	0.2762	0.0893	0.2929	0.0317	0.1041	0.0297	0.0091	0.106 + j0.039	0.476 + j0.408	9.9	329	309
AL115M81-250	1500	6672	0.071	0.232	0.089	0.292	0.0831	0.2725	0.0932	0.3058	0.0313	0.1027	0.0285	0.0087	0.090 + j0.038	0.458 + j0.385	11.8	370	347
AL115M81-350	2100	9341	0.051	0.166	0.064	0.209	0.0797	0.2616	0.1072	0.3519	0.0301	0.0986	0.0247	0.0075	0.064 + j0.036	0.428 + j0.348	16.5	446	402
AL115M81-500	3000	13345	0.035	0.116	0.045	0.148	0.0766	0.2514	0.1247	0.4092	0.0289	0.0948	0.0213	0.0065	0.046 + j0.034	0.401 + j0.308	23.5	533	451
AL115M81-750	4500	20017	0.024	0.077	0.030	0.100	0.0740	0.2426	0.1450	0.4758	0.0279	0.0915	0.0183	0.0056	0.031 + j0.032	0.370 + j0.258	35.3	631	500
AL115M81-1000	6000	26689	0.018	0.058	0.023	0.077	0.0719	0.2358	0.1663	0.5456	0.0271	0.0889	0.0160	0.0049	0.024 + j0.031	0.348 + j0.225	47.0	707	539

* Calculations are based on three cables triplexed / 5 mil 25% over lapping copper tape shield / Conductor temperature of 90°C / Shield temperature of 45°C / Earth resistivity of 100 ohms-meter

† Ampacities are based on Table D17M of the 2015 Canadian Electrical Code Part I (40°C Ambient Air Temperature, indoor installation)

‡ Ampacities are based on Table D17A of the 2015 Canadian Electrical Code Part I

*** For use in cable trays, exposed run and hazardous locations as per the limitations in the Canadian Electrical Code Part I, particularly Table 19.

