



Southwire™

# SERVICE ENTRANCE CATALOG



**BUILT FOR DURABILITY.  
BUILT FOR RELIABILITY.  
BUILT FOR WORK.™**

SOUTHWIRE.COM

# SE/SEU STRAPS

## ONE HOLE - ALUMINUM



232A

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
232A	3 #3 OR #2	100	1000
282A	3 #1/0 OR #2/0	25	250
284A	3 #3/0 OR #4/0	20	100

### FEATURES

- One hole
- Wide wire range
- Stamped aluminum

### APPLICATIONS

- Use to secure SE & SEU service entrance cable in surface mount applications.

### STANDARD MATERIAL

- Aluminum

## TWO HOLE - GALVANIZED STEEL



506

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
506	3#8, 6, 4	100	1000
507	3#3, 2	100	1000
508	3#1/0, 2/0	25	250
509	3#3/0, 4/0	25	250

### FEATURES

- Inverted rib provides strength to keep cable secure
- Snap-on Rigid strap with two holes

### APPLICATIONS

- Use to secure SE & SEU service entrance cable in surface mount applications.

### STANDARD MATERIAL

- Galvanized steel

## ONE HOLE NM STRAP



510RX

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
510RX	14, 12, 10 IN 2 OR 3 CONDUCTOR, WITH OR WITHOUT GROUND. ALSO 14 IN UF	100	1000

### FEATURES

- One hole
- Inverted rib provides strength to keep cable secure

### APPLICATIONS

- Use to secure Romex® Brand nonmetallic sheathed cable in surface mount applications

### STANDARD MATERIAL

- Steel


### STANDARD FINISH

- Zinc plated

# SE LOCK OVER CLIPS



135



## FEATURES

- Securely attaches cable to fascia board

## APPLICATIONS

- Fast and easy installation for service entrance cables

## STANDARD MATERIAL


- Aluminum

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
136	4/3	100	1000	10	1.52"	.75"
137	2/3	100	1000	15	1.62"	.75"
138	2/0	50	500	20	1.82"	.89"
139	4/0	50	500	25	2.20"	1"

# SERVICE ENTRANCE HOODS



709



## FEATURES

- Constructed of crush proof PVC
- Eliminates sharp edges to avoid abrasion

## APPLICATIONS

- Required in overhead applications

## STANDARD MATERIAL

- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
709	3#3-1	10	5	.425"	5"	2"
710	3#2/0-4/0	10	6	6"	5.19"	2.50"

# RIGID OFFSET REDUCERS



1203

## FEATURES

- Reduces conduit size to accommodate an existing knockout
- To offset the raceway

## APPLICATIONS

- Add space to move conduit further away from wall

## STANDARD MATERIAL

- Aluminum


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1203	2" X 1-1/4"	50	22
1204	2-1/2" X 2"	25	21

# SERVICE ENTRANCE CAPS

## CLAMP ON TYPE



731



### FEATURES

- Provides water resistant cap to protect service entrance cables
- Clamp on style for unthreaded conduit

### APPLICATIONS

- Use in an overhead service entrance
- Mounts on top of EMT, Rigid, or IMC conduit
- Serves as a connecting point for the service entrance wires

### STANDARD MATERIAL

- Aluminum
- Steel strap




PART #	SIZE	INSIDE HOLE SIZE	# HOLES	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
731	1/2"	19/64"	4	10	50	9	2.93"	2.62"	2"
732TZ	3/4"	3/8" 13/32"	2 3	10	50	13	3.25"	2.75"	2.37"
733	1"	7/16" 1/2"	2 3	5	25	8	3.50"	3.25"	2.62"
734	1-1/4"	27/64" 5/8"	2 3	5	25	12	4.50"	3.25"	3"
735	1-1/2"	19/32" 7/16" 3/4"	2 1 3	3	15	10	5"	4.75"	3.31"
736	2"	17/32" 3/4" 1"	1 2 3	---	5	5	6.75"	6"	4.62"
737	2-1/2"	7/8" 1" 1-5/16"	3 1 3	---	1	3	10.50"	7.50"	6"
738	3"	7/8" 1" 1-5/16"	3 1 3	---	1	3	11.50"	9"	8"
739	3-1/2"	1-1/8" 1-3/4"	4 3	---	1	5	12"	9"	8"
740	4"	1-1/8" 1-3/4"	4 3	---	1	4	12"	9"	8"

# SERVICE ENTRANCE CAPS

## THREADED TYPE



741



### FEATURES

- Provides water resistant cap to protect service entrance cables
- Threaded style enables easy installation

### APPLICATIONS

- Use in an overhead service entrance
- Mounts on top of Rigid, or IMC conduit
- Serves as a connecting point for the service entrance wires

### STANDARD MATERIAL

- Aluminum

PART #	SIZE	INSIDE HOLE SIZE	# HOLES	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
741	1/2"	19/64"	4	5	50	12	2.68"	2.60"	2"
742	3/4"	3/8" 13/32"	2 3	5	50	15	3.80"	2.72"	2.37"
743	1"	7/16" 1/2"	2 3	---	50	15	3.32"	3.11"	2.62"
744	1-1/4"	27/64" 5/8"	2 3	---	20	10	4.46"	3.20"	3"
745	1-1/2"	19/32" 7/16" 3/4"	2 1 3	---	10	7	4.85"	4.34"	3.31"
746	2"	17/32" 3/4" 1"	1 2 3	---	5	4	6.62"	5.44"	4.62"
747	2-1/2"	7/8" 1" 1-5/16"	3 1 3	---	2	8	9.74"	7.80"	6"
748	3"	7/8" 1" 1-5/16"	3 1 3	---	1	6	10.50"	8"	8"
749TZ	3-1/2"	1-1/8" 1-3/4"	4 3	---	1	6	13.02"	9.39"	8"
750	4"	1-1/8" 1-3/4"	2 4	---	1	7	13.14"	8.54"	8"
750A	5"	1-1/8" 1-3/4"	2 4	---	1	12	11.28"	8.77"	8.25"
750B	6"	1-1/8" 1-3/4"	2 4	---	1	14	12.25"	9.76"	8.25"


SERVICE ENTRANCE

# SERVICE ENTRANCE CAPS

PVC



727



## FEATURES

- Heavy duty construction
- Snap on cover

## APPLICATIONS

- Use as a connecting point in an overhead service entrance for SEU cable
- Fits 2/3, 3#2/0 and #4/0 cables

## STANDARD MATERIAL


- PVC

PART #	FITS CABLE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
727	2/3	30	8	2.75	2.75	1.87
729	3#2/0, #4/0	10	11	4.25	4.25	3

# CLAMP ON WITH SPLIT INSULATOR



707



## FEATURES

- Provides water resistant cap when mounted on conduit
- Eliminates sharp edges to protect wire

## APPLICATIONS

- Required in overhead applications
- Fits 3#8 to 3#1 and #1/0 to 4/0 cables

## STANDARD MATERIAL


- Zinc die cast
- Steel strap

PART #	FITS CABLE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
707	3#8 TO 3#1	20	8	2.37"	2.25"	2.25"
708	1/0 TO 4/0	10	11	4.93"	3.12"	3.75"

# SET SCREW TYPE



704TZ



## FEATURES

- Eliminates sharp edges to protect wire
- Extended hood

## APPLICATIONS

- Required in overhead applications
- For 2" to 2-1/2" pipe sizes

## STANDARD MATERIAL

- Aluminum

PART #	PIPE SIZE	HEAD SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
704TZ	2"	1-1/4"	10	10	4.75"	4"	3.12"
705TZ	2-1/2"	1-1/4"	10	20	5.25"	4"	3"
706TZ	2-1/2"	2"	10	20	7"	5.50"	4.50"

SERVICE ENTRANCE

# ROOF FLASHINGS

## GALVANIZED WITH NEOPRENE SEAL



### FEATURES

- Strong galvanized steel with neoprene seal
- Flexible collar

### APPLICATIONS


- Watertight protection for service entrance conduit or ventilation pipes
- Directs water flow away from riser pipe entry point

### STANDARD MATERIAL

- Galvanized steel
- Neoprene seal

PART #	SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B
984TZ	1-1/4"	25	18	12.50"	8.75"
985TZ	1-1/2"	25	24	12.50"	8.375"
986TZ	2"	25	24	14.50"	10.75"
987	2-1/2"	25	25	14.50"	10.75"

## NEOPRENE

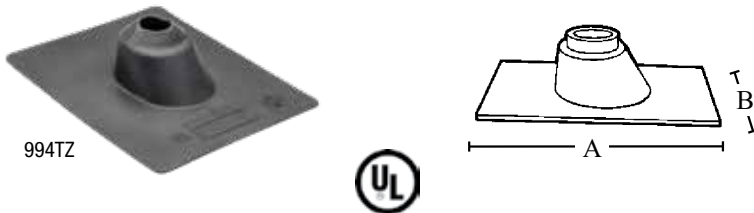

### FEATURES

- Repels weather related damage from snow, ice and rain
- No caulking required
- Durable neoprene construction

### APPLICATIONS

- Watertight protection for service entrance conduit or ventilation pipes
- Directs water flow away from riser pipe entry point

### STANDARD MATERIAL

- Neoprene

PART #	SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B
994TZ	1-1/4" - 1-1/2"	12	5	12.50"	8.75"
995TZ	2"	12	5	12.50"	8.375"
996	2-1/2"	12	5	14.50"	10.75"
997	3"	12	6	14.50"	10.75"

## NO-CAULK



P-339

### FEATURES

- Flashing base and collar are separate
- Fits flat surface up to 45 deg pitch
- For plastic, cast iron, or galvanized pipe

### APPLICATIONS

- Prevents water leaks where conduit enters roof surface

### STANDARD MATERIAL

- 24 gauge galvanized steel base, elastomeric compound collar

## UNIVERSAL



P-400

### FEATURES

- Conforms to uneven surfaces for a tight seal
- Conforms to uneven surfaces for a tight, dry seal pipe

### APPLICATIONS

- Prevents water leaks where conduit enters roof surface

### STANDARD MATERIAL

- Heavy-duty aluminum alloy base, elastomeric compound collar


PART #	SIZE	MASTER QTY.
P-339	1-1/4" TO 1-1/2"	12
P-340	2"	12
P-342	3"	12
P-344	4"	12

PART #	SIZE	MASTER QTY.
P-400	1-1/4" TO 4"	6

# METER HUBS



9663



## FEATURES

- Includes hardware
- Corrosion resistant construction withstands inclement weather
- Mounting hole space is 2.5" on center

## APPLICATIONS

- Attach to meter boxes or enclosures to provide threaded opening for conductors

## STANDARD MATERIAL

- Zinc die cast


PART #	SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B
9663	1"	10	3	3.25"	3.25"
9674	1-1/4"	10	2	3.25"	3.25"
9685	1-1/2"	10	2	3.25"	3.25"
9696	2"	10	2	3.25"	3.25"
9707	2-1/2"	10	2	3.25"	3.25"

# SILL PLATES

## ZINC DIE CAST



591TZ



## FEATURES

- Accompanying sealing compound and screws ensures watertight seal
- Domed top offers maximum protection

## APPLICATIONS

- Protects wires and aluminum entry holes
- Sizes for EMT and SEU

## STANDARD MATERIAL

- Zinc die cast

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	C
591TZ	1/2" EMT & 3/4" EMT	10	100	10	2.37"	1"	2.61"
593	1" EMT & 3/3 SEU	10	100	40	2.50"	1.25"	3"
594	1-1/4" EMT & 2/3 SEU	---	25	15	2.61"	1.56"	3.76"
595	1-1/2" EMT	---	25	11	3.580"	1.738"	3.568"
596	4/0 SEU	---	20	17	5.81"	1.88"	3.48"
596A	2" EMT	---	25	16	4.20"	2.29"	4.76"

## PVC (1900) AND ALUMINUM (ME14)



1900

## FEATURES

- Corrosion resistant

## APPLICATIONS

- Prevents water from entering structure when used with sealing compound (Southwire parts 1901 or 1905)

## STANDARD MATERIAL

- PVC (1900) and Aluminum (ME14)

PART #	CABLE RANGE	INNER QTY.	MASTER QTY.
1900	#4 - 0	10	100
ME14	#3/0 - 4/0	---	5



# DUCT-SEAL WEATHERPROOF COMPOUND

GRAY, ASBESTOS FREE



961



## FEATURES

- Permanently soft
- Non-corrosive to metals or plastics; will not harm skin
- Adheres to clean surfaces

## APPLICATIONS

- Forms water and air tight seals around junction boxes
- Deadens switch gear panel noise

## STANDARD MATERIAL


- Non toxic compound; asbestos free

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
961	1 LB.	50	50
965TZ	5 LB.	10	50

# SERVICE ENTRANCE ELLS-SLB



211TZ



## FEATURES

- Provides easy access for service
- Includes cover and gasket

## APPLICATIONS

- Enables effortless wire pulling when raceway alters direction

## STANDARD MATERIAL

- Die cast copper free aluminum


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
211TZ	1/2"	10	50	13	3.155"	1.187"	1.375"
212	3/4"	10	50	16	3.47"	1.36"	1.625"
213TZ	1"	5	25	12	4.18"	1.72"	1.9375"
214	1-1/4"	2	10	8	5.515"	2.178"	2.4375"
214XL	1-1/4" LONG	---	2	3	6.095"	2.41"	2.6875"
215	1-1/2"	1	5	6	6.595"	2.846"	3.0625"
216	2"	1	5	10	7.91"	2.75"	2.75"
216XL	2" LONG	---	1	3	7.74"	3.88"	3.375"

SERVICE ENTRANCE

# KENNY CLAMPS



1750



## FEATURES

- Use as a grounding and bonding connector
- 1/2" knockout

## APPLICATIONS

- Bonds a grounding electrode conductor to metallic conduit panel boards or transformer enclosures

## STANDARD MATERIAL

- Brass


PART #	SIZE	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1750	3/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1751	2/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1752	1/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1753	2 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1754	4 SOLID	1/2"	10	100	35	1.75"	1.0625"
1755	4 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1756	6 SOLID	1/2"	10	100	35	1.75"	1.0625"
1757	6 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1758	8 SOLID	1/2"	10	100	35	1.75"	1.0625"
1759	8 STRANDED	1/2"	10	100	35	1.75"	1.0625"

# WIREHOLDERS

## ADJUSTABLE



999



## FEATURES

- Corrosion resistant and electro-galvanized finish ensure a long product life in all climates
- The unique design allows for safe and secure installation of power drop cables on the outside of buildings

## APPLICATIONS

- Protects sheathing and ensures performance

## STANDARD MATERIAL

- Porcelain/steel

## STANDARD FINISH

- Steel parts are electro-galvanized


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C
999	1-1/4" - 3"	20	34	7.62"	5.60"	1" X .875"

# WIREHOLDERS

## LIGHT DUTY WITH LAG SCREW



1001TZ



### FEATURES

- Light duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

### APPLICATIONS

- Secure wires before entry into a mast or SE cap

### STANDARD MATERIAL


- Porcelain/steel

PART #	LAG	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	OPENING C	D
1001TZ	1-11/16"	100	25	3.0625"	1.375"	.5" X .375"	1.687"

## MEDIUM DUTY WITH LAG SCREW



1002



### FEATURES

- Medium duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

### APPLICATIONS

- Secure wires before entry into a mast or SE cap

### STANDARD MATERIAL


- Porcelain/steel

PART #	LAG	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	OPENING C	D
1002	2-1/4"	50	32	5.25"	1.968"	.5" X .375"	2.25"

## HEAVY DUTY WITH LAG SCREW



1003



### FEATURES

- Heavy duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

### APPLICATIONS

- Secure wires before entry into a mast or SE cap


### STANDARD MATERIAL

- Porcelain/steel reinforced

PART #	LAG	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	OPENING C	D
1003	2-1/4"	50	34	6.1563"	1.875"	1" X .875"	2.25"

# WIREHOLDERS

## HEAVY DUTY



### FEATURES

- Heavy duty for optimal performance
- Protects sheathing
- Bolt or hanger assembly

### APPLICATIONS



- Secure wires before their entry into a mast or SE cap

### STANDARD MATERIAL

- Porcelain/steel

PART #	BOLT SIZE	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1004	3/8" X 5"	---	25	22	8.156"	1.875"	1" x .875"	5"
1008	HANGER	2"	25	31	6.416"	1.875"	1" x .875"	3.375"

# WEDGE GRIP CLAMPS



### FEATURES

- Solid 6-1/2" stainless steel bail
- High quality aluminum for durability

### APPLICATIONS



- Supports power cables and other conductors when attached to buildings or utility poles

### STANDARD MATERIAL

- Steel reinforced aluminum conductor

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C
1005TZ	6 ACSR - 2 ACSR	50	8	3"	6.07"	5.45"
1006	4 ACSR - 1/0 ACSR	25	7	3.75"	7.26"	5.45"
1007	2/0 ACSR - 4/0 ACSR	25	8	3.75"	7.28"	5.45"

# UNIVERSAL PIPE SUPPORT

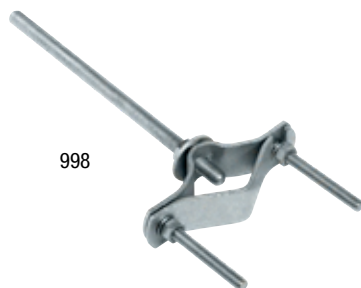

### FEATURES

- 10" bolt
- High strength construction

### APPLICATIONS

- Secure pipe sizes 1-1/4" to 3"

### STANDARD MATERIAL

- Steel

PART #	BOLT SIZE	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
998	1-1/4" - 3"	1/2"	20	18	4.125"	9.75"	1.25"

# UTILITY SERVICE DROP, FORK BOLT BRACKETS

STEEL



FBL

**FEATURES**

- 10" bolt
- High strength construction

**APPLICATIONS**

- Use to provide attachment points for miscellaneous drop wire clamps on buildings with deep walls

**STANDARD MATERIAL**

- Steel

**STANDARD FINISH**

- Hot dipped galvanized

PART #	BOLT LENGTH	DESCRIPTION	MASTER QTY.
FB	12"	FOR K BOLT BRACKETS FOR POWER LINE SUPPORT	10
FBL	18"		10

# UTILITY SERVICE DROP, MOUNTING PLATE

STEEL



SDP

**FEATURES**

- .59" diameter mounting hole and slot opening

**APPLICATIONS**

- Bolts to exterior of building structure providing attachment point for drop wire clamps

**STANDARD MATERIAL**

- Steel

**STANDARD FINISH**

- Hot dipped galvanized

PART #	DESCRIPTION	MASTER QTY.
SDP	SERVICE DROP MOUNTING PLATE	10

# UTILITY POLE CONDUIT SUPPORT STAND-OFF BRACKET

STEEL



SOB-1

**FEATURES**

- 60" diameter pole mounting holes
- Clamping action stabilizes conduit on utility pole

**APPLICATIONS**

- Secures 2" to 6" conduit vertically to utility pole

**STANDARD MATERIAL**

- Steel

**STANDARD FINISH**

- Hot dipped galvanized

PART #	DESCRIPTION	MASTER QTY.
SOB-1	UTILITY POLE CONDUIT SUPPORT	10


SERVICE ENTRANCE

# WATERTIGHT CONNECTORS

## FOR UF CABLE



871



### Features

- Compression type
- Rubber grommet

### Applications

- Use to secure SE/SEU cable to a metal enclosure
- Use to connect UF cable to a waterproof box with a threaded hub
- For SE/SEU flat style cable; two insulating conductors

### Standard Material


- Steel or zinc

PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING		C
						A	B	
<b>ZINC</b>								
871	1/2"	2#14	25	250	43	.22" x .44"		1.437"
872TZ	3/4"	3#14	25	250	65	.22" x .44"		1.75"
<b>STEEL</b>								
872S	3/4" STEEL	3#14	25	250	45	.22" x .44"		1.75"

## COMPRESSION TYPE



873



### FEATURES

- Compression type
- Rubber grommet

### APPLICATIONS

- Use to secure SE/SEU cable to a metal enclosure
- For SE/SEU flat style cable; two insulating conductors


### STANDARD MATERIAL

- Zinc die cast


PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING		C
						A	B	
873	1"	3#8	10	100	34	0.400"	0.630"	1.56"
873A	1"	3#6	10	100	34	0.440"	0.700"	1.56"
873B	1"	3#4	10	100	34	0.500"	0.800"	1.56"
874	1-1/4"	3#3	10	100	52	0.510"	0.850"	1.99"
874A	1-1/4"	3#2	10	100	52	0.570"	0.940"	1.99"
874B	1-1/4"	3#1	10	100	52	0.660"	1.120"	1.99"
875	1-1/2"	3#1/0	5	50	33	0.705"	1.195"	2.18"
875A	1-1/2"	3#2/0	5	50	32	0.740"	1.240"	2.18"
876	2"	3#1/0	5	50	44	0.705"	1.195"	2.41"
876A	2"	3#2/0	5	50	44	0.740"	1.240"	2.41"
876B	2"	3#3/0	5	50	44	0.830"	1.415"	2.41"
876C	2"	3#4/0	5	50	44	0.890"	1.540"	2.41"
876D	2"	3#4/0	5	50	44	0.990"	1.580"	2.41"

# CONDUIT SUPPORTS

## ALUMINUM LAG SCREW TYPE



1000



### FEATURES

- Accommodates conduit sizes of 2" or 2-1/2"
- Includes lag screw

### APPLICATIONS

- Affixes conduit to a structure or line pole

### STANDARD MATERIAL


- Aluminum

PART #	CONDUIT SIZE	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1000	2"	2.375	25	15	2.875"	.875"
1000A	2-1/2"	2.75	25	26	3.30"	.875"

## MALLEABLE IRON LAG SCREW TYPE



1106



### FEATURES

- Accommodates conduit sizes of 2" or 2-1/2"
- Includes lag screw

### APPLICATIONS

- Affixes conduit to a structure or line pole

### STANDARD MATERIAL


- Malleable iron

PART #	CONDUIT SIZE	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1106	2"	2.375	25	32	2.70"	.985"
1107	2-1/2"	2.375	35	87	3.295"	1.08"

## SPLIT RING



1097A



### FEATURES

- Accommodates conduit sizes of 2" or 4"
- Includes lag screw

### APPLICATIONS

- Affixes conduit to a structure or line pole

### STANDARD MATERIAL

- Malleable iron

PART #	CONDUIT SIZE	BOLT SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1097A	2"	1/2" - 10"	25	12	2.70"	.985"
1097	2-1/2"	1/2" - 10"	25	13	3.33"	1.071"
1098	3"	5/8" - 13"	10	25	4.50"	1.04"
1099	3-1/2"	5/8" - 13"	10	27	5.125"	1.075"
1100	4"	5/8" - 13"	10	28	5.593"	1.075"

# SERVICE ENTRANCE MAST KITS

## FEATURES

- Accommodates multiple specifications
- Kits eliminate need to purchase and stock additional components

## APPLICATIONS

- Provides an assortment of SE mast components for the installation of overhead service drops

## 2" KIT



736



1106



986TZ



1008

PART #	PIPE SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1966	2"	1	4
CONSISTS OF 736, 986TZ, 1008, 1106			

## 2-1/2" KIT



737



1107



987



999

PART #	PIPE SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1977TZ	2-1/2"	1	4
CONSISTS OF 737, 987, 999, (2)1107			





**Southwire™**

# **SERVICE ENTRANCE CATALOG**

## **GET SOCIAL WITH US:**



**/SOUTHWIRETOOLS  
/SOUTHWIRETOOLSLATINO**



**@SOUTHWIRETOOLS**



**@SOUTHWIRETOOLS**



**SOUTHWIRETOOLS**

**SOUTHWIRE.COM | 1-855-SWTOOLS**

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.  
Any other TM/® - Trademark or Registered Trademark of Southwire Company.